

CHILDREN'S ELECTRONIC TOY GOLF CART



WARNING:

Must be assembled by an adult.

- Suitable for 3+ Years
- Individual user weight: 30 KG
- Total users weight: 120 KG

OWNERS MANUAL

with Assembly Instructions

Read and understand this entire manual before using!

Please keep this manual for future reference as it contains important information. Before first time use, charge the battery for at least 4-6 hours, but no more than 10 hours.

On the purchase of your new Ride-On.

This ride-on car will provide your child with many miles of riding of enjoyment. To help assure you and your rider a safe ride we ask you to please read this manual carefully, and keep it for future reference.

Follow the recommendations in this manual, they are designed to improve the safety and operation of your ride-on car and its rider.

Specification

	2WD	4WD	4WD	2WD	2WD
Battery	12V7AH*1	12V10AH*1	24V7AH*1	24V7AH*1	24V7AH*1
Charger	12V700-1000mA	12V1000-1500mA	24V800mA	24V800mA	24V800mA
input	Depend on local voltage				
Motor	550-12000*2	550-12000*4	550-13500*4	550-13500*2	555-20000*2
Steering Motor	390-5000*1				

Suitable age: 3+ Years

Charge time: 8~12 hours

Load capacity: Individual user weight: 30 KG, Total user weight: 120 KG

Size of car: 130.5 × 75 × 70 CM

Speed: 3-7 km/h



BATTERY INFORMATION

- Non-rechargeable batteries are not to be recharged.
- Rechargeable batteries are to be removed from the toy before being charged.
- Rechargeable batteries are only to be charged under adult supervision.
- Different types of batteries or new and used batteries are not to be mixed.
- Batteries are to be inserted with the correct polarity.
- Exhausted batteries are to be removed from the toy.
- The supply terminals are not to be short-circuited.



WARNING:

- **CHOKING HAZARD!** Not suitable for children under 36 months.
- Must be assembled by an adult.
- To reduce the risk of injury, adult supervision is required.
- Never use in roadways, near motor vehicles, on or near steep inclines or steps, swimming pools or other bodies of water; always wear shoes, and never allow more than 2 rider.
- Power supply or battery charger used with the electric toy shall be regularly examined for damage to the supply cord, plug, enclosure or other parts, and in the event of damage, it shall not be used until the damage has been repaired.
- Use only battery(ies) and charger specified by the manufacturer.
- The battery on the vehicle is not replaceable.
- This toy should be used with caution since skill is required to avoid falls or collisions causing injury to the user or third parties.
- Protective equipment should be worn.
- Always wear shoes, always sit on the seat.
- Not to be used in traffic.
- This toy is unsuitable for children under 36 months due to its maximum speed; Individual user weight: 30 KG, Total user weight: 120 KG.
- This toy has no brake.
- Always wear protective equipment such as helmet, gloves, elbow and knee pads, also long sleeved shirts and long trousers help protect skin.



Rules for Safe Riding

- Keep Children within Safe Riding Areas.
- Use the toy only on flat surfaces. Such as inside your house, garden or playground.
- Never use in the dark. A child could encounter unexpected obstacles and have an accident. Operate the vehicle only in the daytime or a well-lit area.
- It is prohibited to change the circuit or add other electric parts
- Inspect wires and connections of the vehicle periodically.
- Do not let any child touch the wheels or be near them when the car is moving .
- This vehicle has adjustable play seat belts. Please instruct children how to tie the safety belt before using, guarantee the security.

- 1** Vehicle body
x1



- 2** Front bumper
x1



- 3** Gear box
2WD x2
4WD x4



- 4** Driving wheel
2WD x2
4WD x4




- 5** Normal wheel
2WD x2
4WD /



- 6** #12 washer
2WD x8
4WD x6



- 7** #10 Lock nut
x4



- 8** Hubcap
x4



- 9** Rear axle bracket
x1



- 10** Rear axle
x1



- 11** Front axle
x1

2WD



4WD



- 12** Steering wheel
x1



- 13** M5x40 machine screw
x1



- 14** #5 nut
x3



- 15** Front handle guard
x2



- 16** Seat back
x2



- 17** Seat cushion
x4



- 18** #4x12 screw
x42



- 19** Rear handle guard
x2



- 20** Front roll bar
x1



- 21** Rear roll bar linkage
x1



- 22** Rear roll bar support
(left and right)




- 23** Mirror
(left and right)
x2



- 24** Anti-roll wheel
x2



- 25** Socket wrench
x2



- 26** Charger
x1



- 27** Remote controller
(If equipped)
x1





Assembly tools required (not included):

Screwdriver





HINT: Some parts shown are assembled on both sides of vehicle

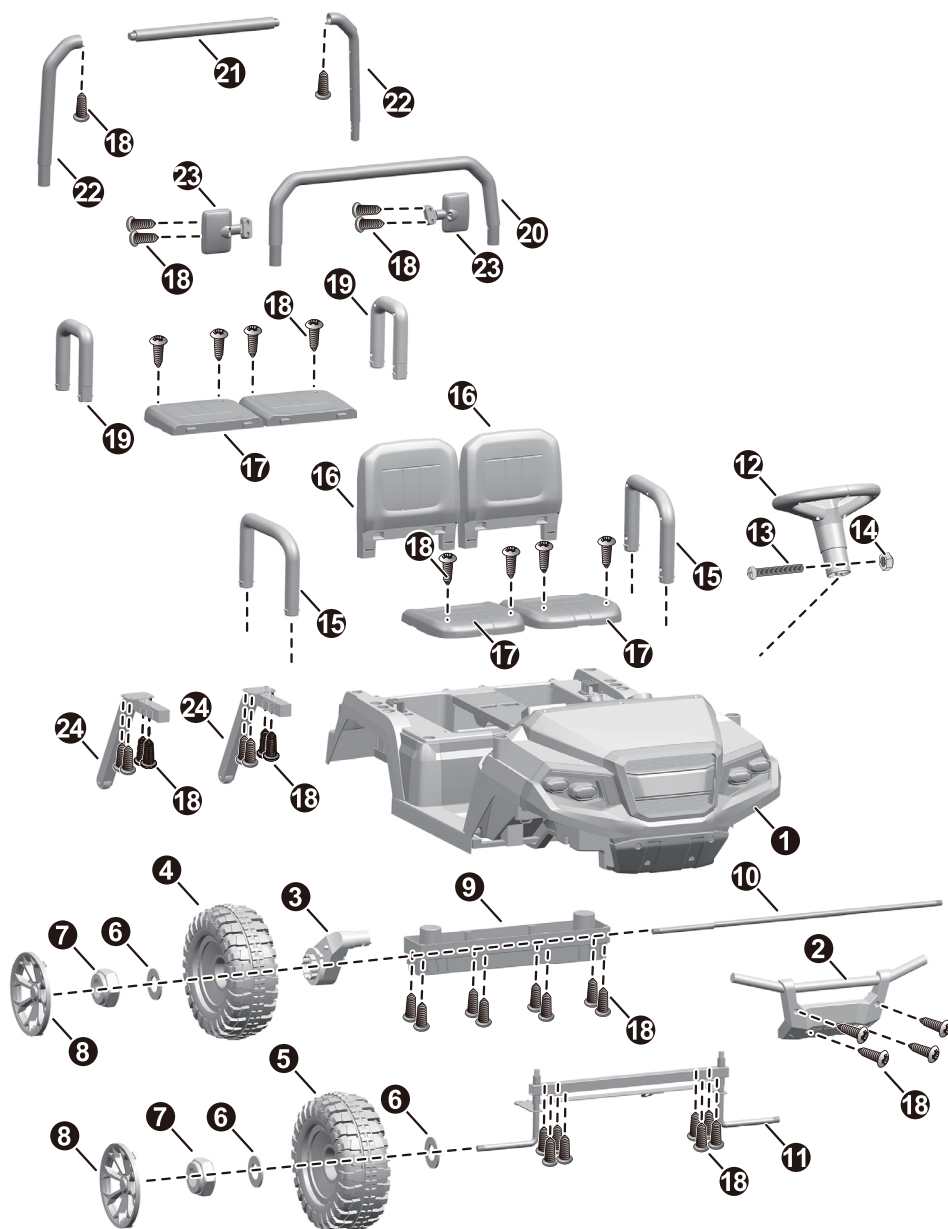

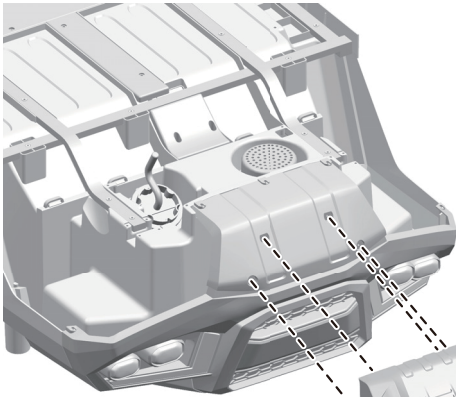


1. Fit the bull bar to the body.
2. Insert four #4x12 screws and tighten with a screwdriver.
3. Fit the front axle to the body.
4. Insert the bent end of the steering column into the hole in the steering linkage.
5. Insert eight #4x12 screws and tighten with a screwdriver.

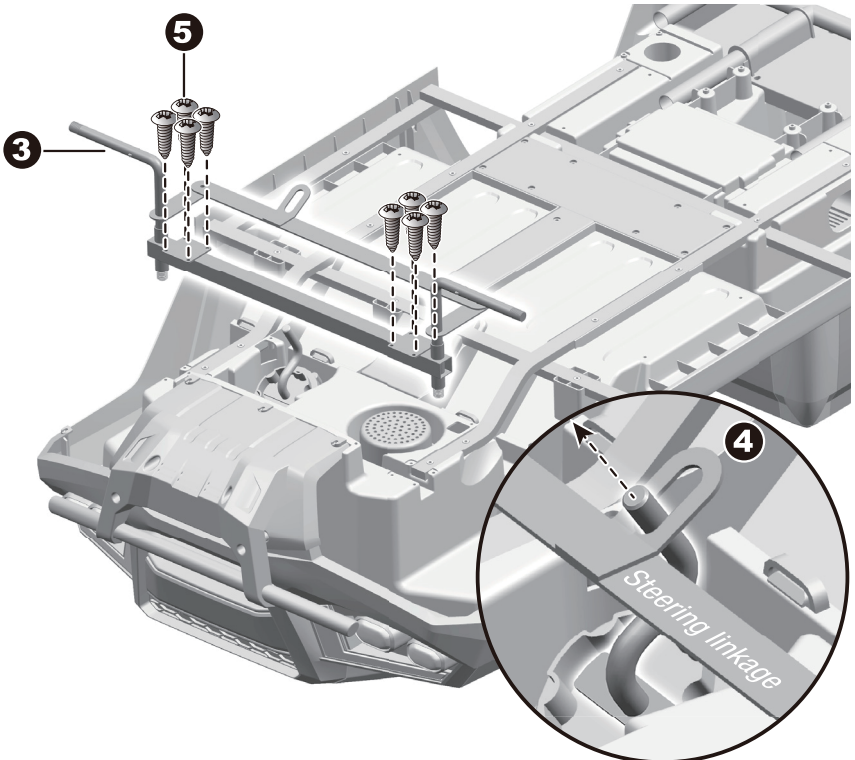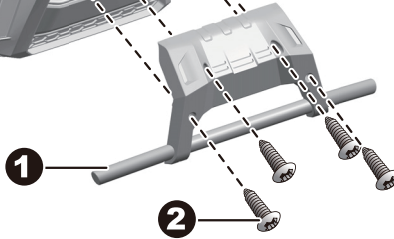

2WD


Front botttom View

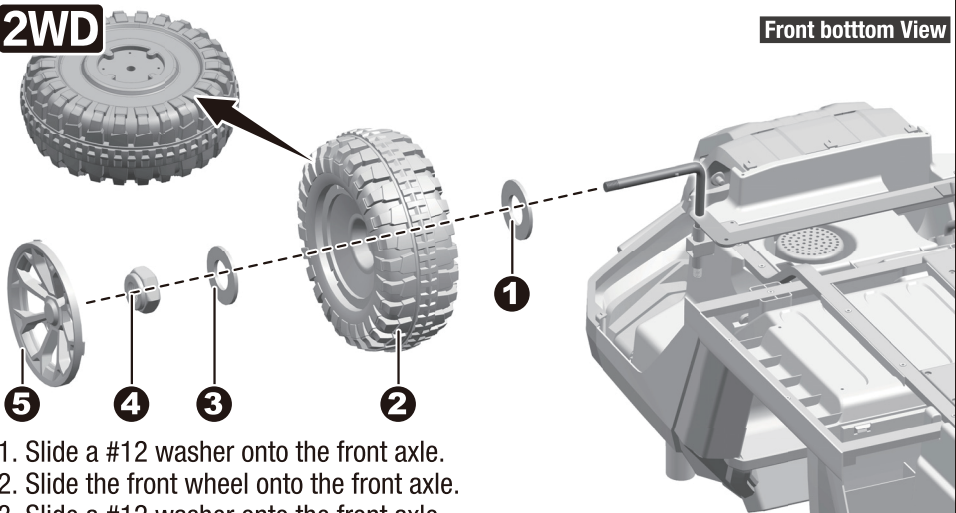


1. Slide a #12 washer onto the front axle.
 2. Slide the front wheel onto the front axle.
 3. Slide a #12 washer onto the front axle.
 4. Tighten a lock nut to the end of the front axle with a socket wrench.
 5. "Snap" the wheel hubcap to the front wheel.
- Repeat for the other front wheel.

4WD

Front botttom View

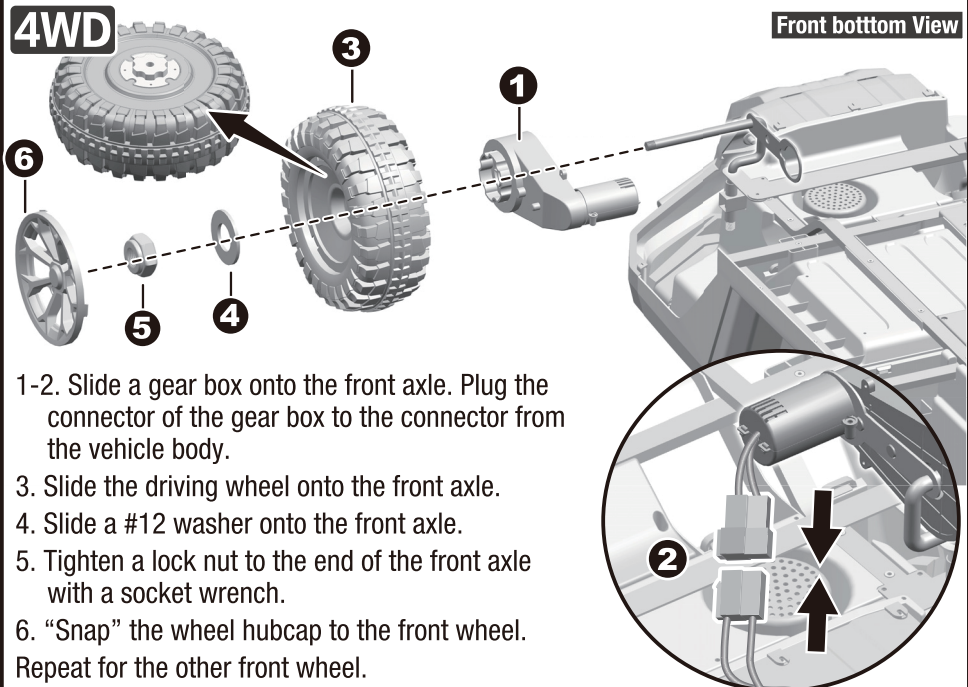



- 1-2. Slide a gear box onto the front axle. Plug the connector of the gear box to the connector from the vehicle body.
 3. Slide the driving wheel onto the front axle.
 4. Slide a #12 washer onto the front axle.
 5. Tighten a lock nut to the end of the front axle with a socket wrench.
 6. "Snap" the wheel hubcap to the front wheel.
- Repeat for the other front wheel.

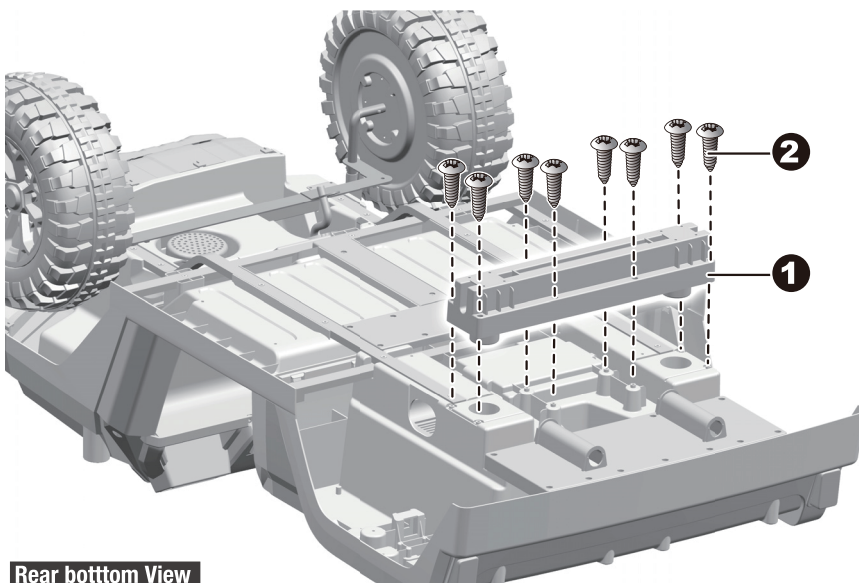


Rear botttom View

1. Fit the rear wheel bracket onto the vehicle body.
2. Insert eight #4x12 screws and tighten with screwdriver.
3. Fit the rear axle into the hole in the rear axle bracket.

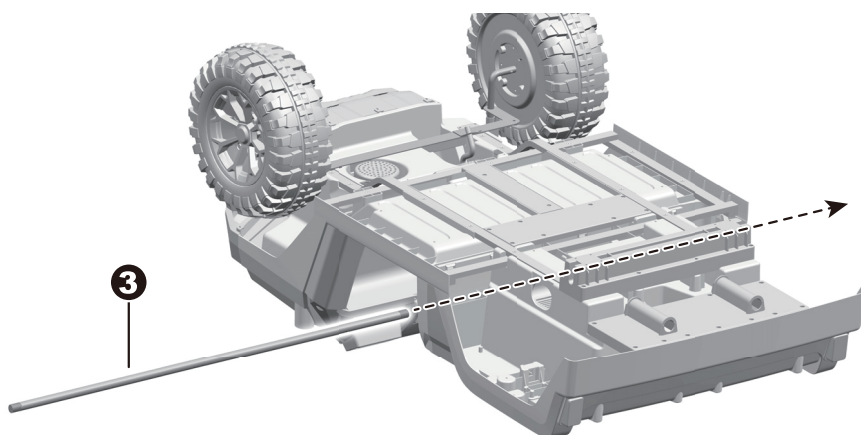

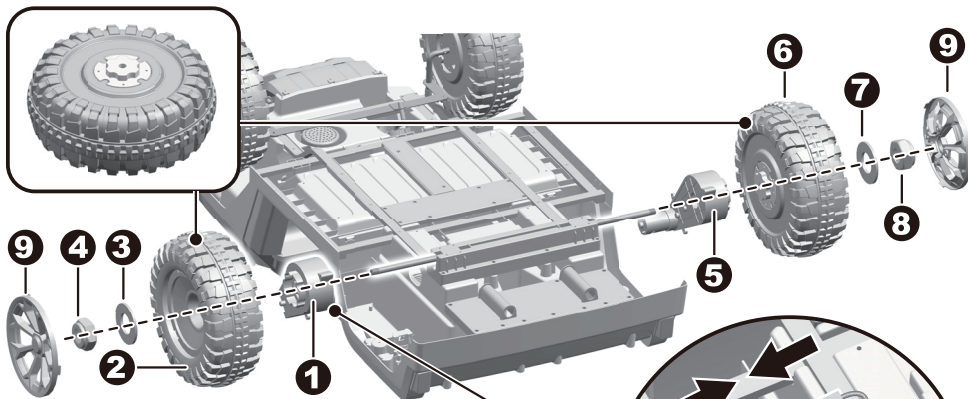

1. Slide a gear box on the rear axle, and plug the connector of the rear gear box to the connector from the vehicle body (fig 2a)
2. Slide the onto the rear alxe. Ensure the wheel driver match up with the gear box.
3. Slide a #12 washer onto the front axle.
4. Tighten a lock nut to the end of the front axle with a socket wrench. DO NOT over tgithen.
- 5-8. Repeat the above procedures to assemble the other rear wheel. **HINT:** An extra socket wrench has been provided to hold the Lock Nut on the other side of the rear axle while tightening the Lock Nut on the other side.
9. “Snap” the hubcap to the wheel.

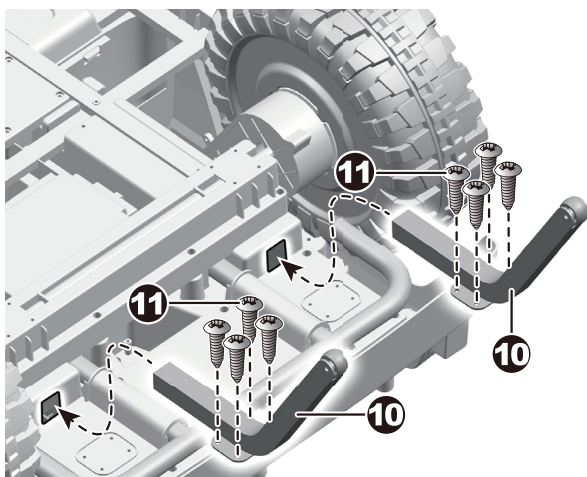


10. Fit the rear anti-roll wheel to the body,.
11. Insert and tighten four #4x12 screws with a screwdriver.




WARNING!



Be sure to follow the steps to assemble the **ANTI-ROLL WHEELS (part 27)** to the body to avoid the product tipping over when using the product.

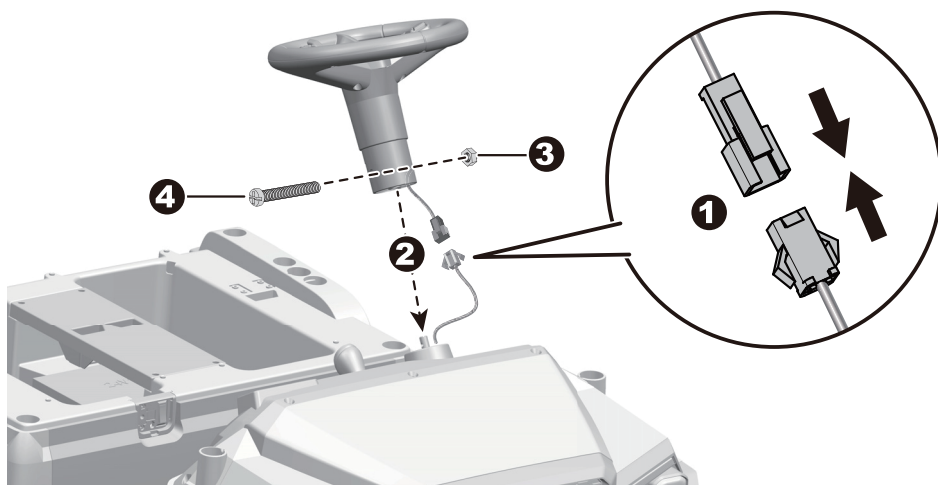



Turn the vehicle body upright.


1. Plug the sound unit connector on the steering wheel into the connector on the vehicle body.
2. Fit the steering wheel to the end of the steering column.
3. Insert the #5 nut into the slot at right side of the steering wheel.
4. Line up the holes on the steering wheel with the holes on the steering column, insert the M5x40 machine screw.
5. Plug the red connector on the vehicle body into the red connector on the battery.
6. Fit the seat backs to the vehicle body, push until you hear it “click” into place.

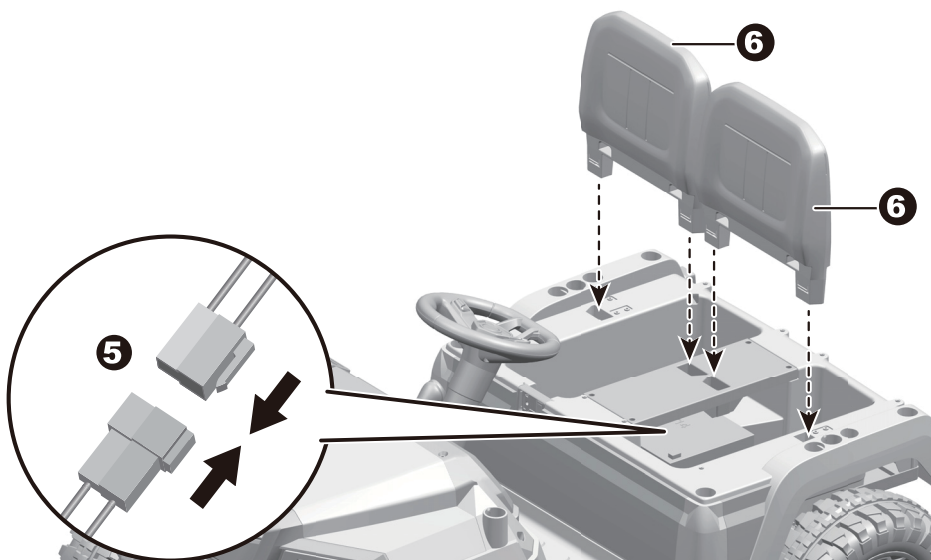

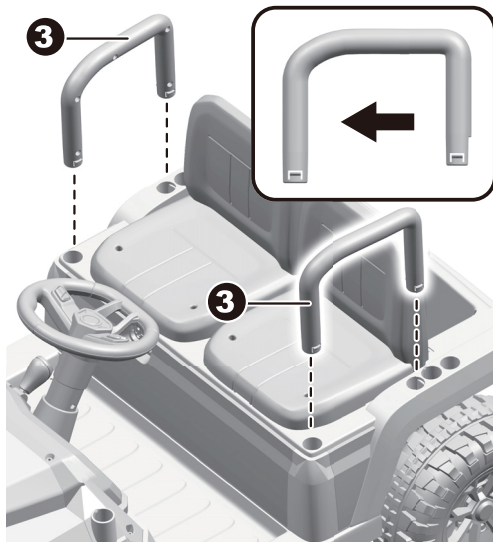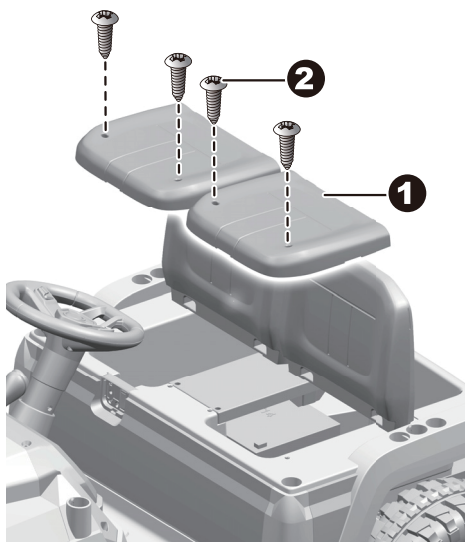


1. Fit the two seat cushions to body.
2. Insert and tighten two screws on each seat cushion with a screwdriver.
3. Insert the front handle guard to the holes in the body, push until you hear it click into place. Repeat for the other side.
4. Fit another two seat cushions to the body.
5. Insert and tighten two screws on each seat cushion with a screwdriver.
6. Insert the rear handle guard to the holes in the body, push until you hear it click into place. Repeat for the other side. Repeat for the other one.

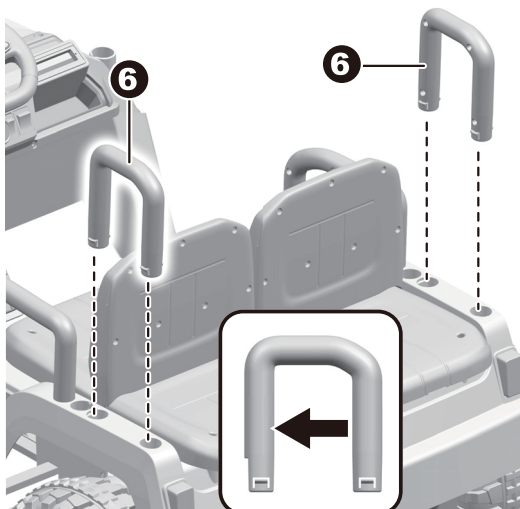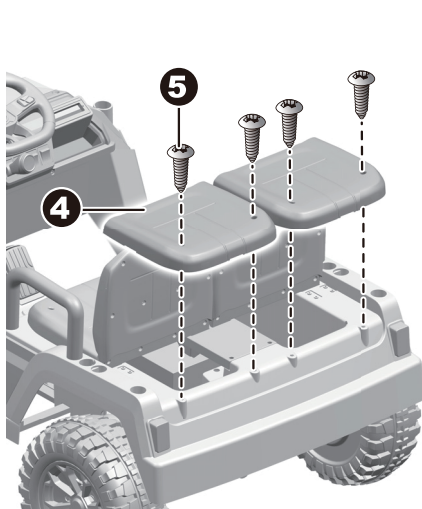

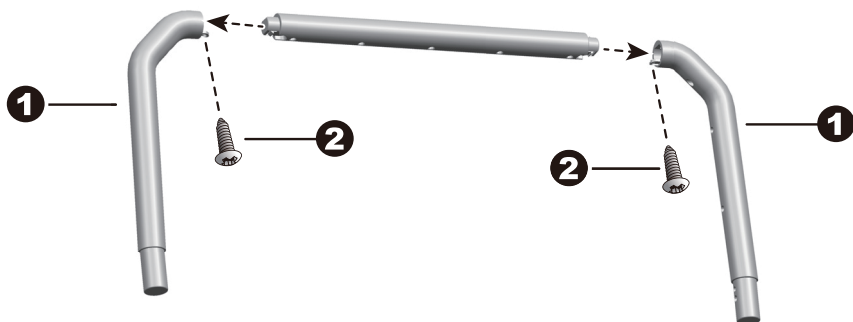



1. Fit the rear roll bar supports the rear roll bar linkage.
2. Insert and tighten two #4x12 screws and tighten with a screwdriver.
3. Fit the rear roll bar assembly to the body as shown.



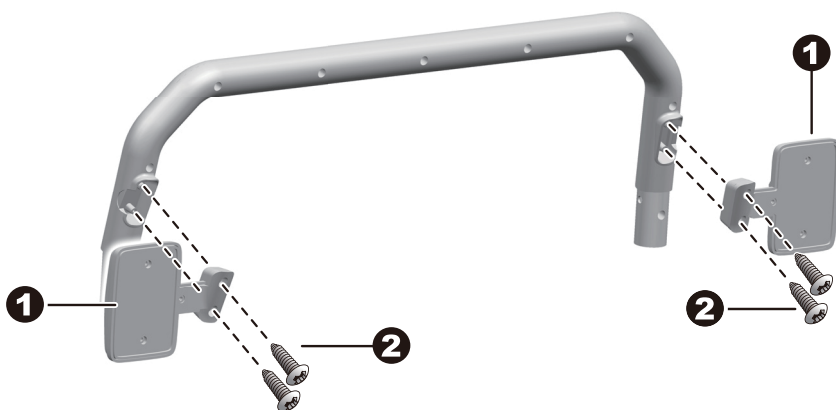

1. Fit mirrors L & R to the front roll bar.
2. Insert and tighten two #4x12 screws on each mirror and tighten with a screwdriver.
3. Fit the front roll bar assembly to the body as shown.

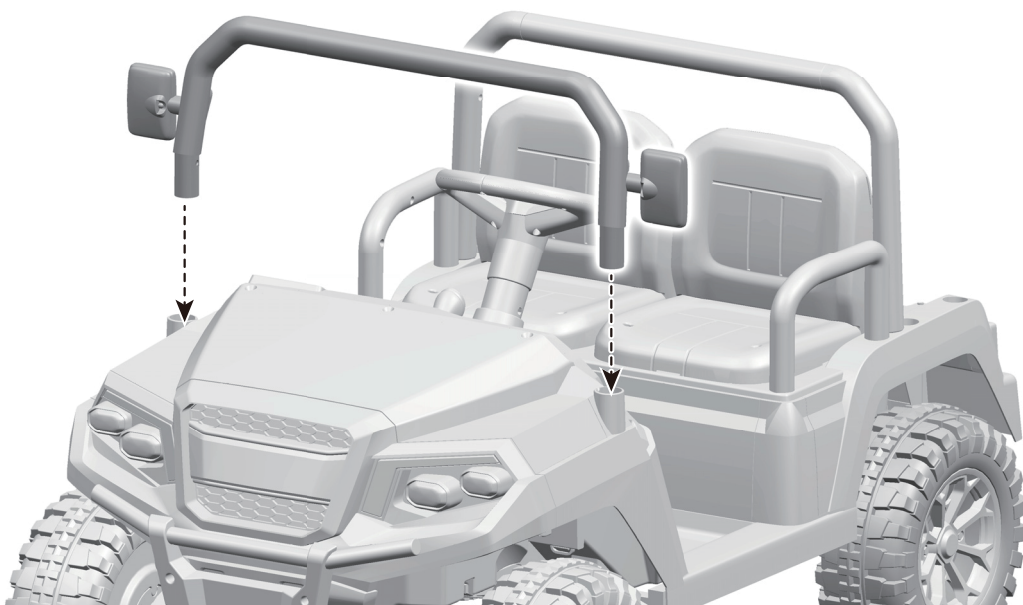

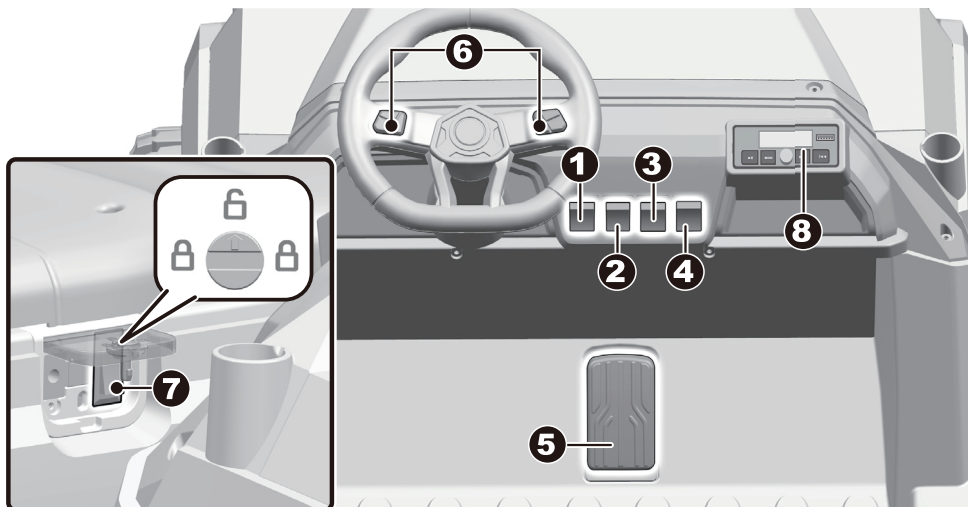


- 1. Power switch (if equipped, option II refer the next page):** Turns the product on and off.
- 2. Forward/Reverse switch (if equipped, option II refer the next page):**
Changes the direction that product moves from forward to reverse.
 - To move the product forward, shift the lever to top position.
 - To move the product backward, shift the lever to down position.
- 3. High/Low speed switch (if equipped, option II refer the next page):**
Operates the product to move forward in high or low speed.
- 4. Light switch (if equipped, option II refer the next page):** Turns lights on and off.
- 5. Accelerator pedal:**
 - To move the product, press the pedal down.
 - To brake or slow down, release pressure from the pedal.
- 6. Sound buttons:** Press for sound or horn playing.
- 7. RC-Manual switch (if equipped, this switch is under the seat, please turn the knob to the unlocked position and open the protective cover.):**
 - Rock the switch to the “RC” position, and the product is only allowed to be controlled by the remote controller.
 - Rock the switch to the manual position to allow manual operation of the product.



WARNING!


- Always stop vehicle when changing the speed or direction to avoid damage the gears and motor.
- The protective cover must be opened by an adult.

8. Audio Player:

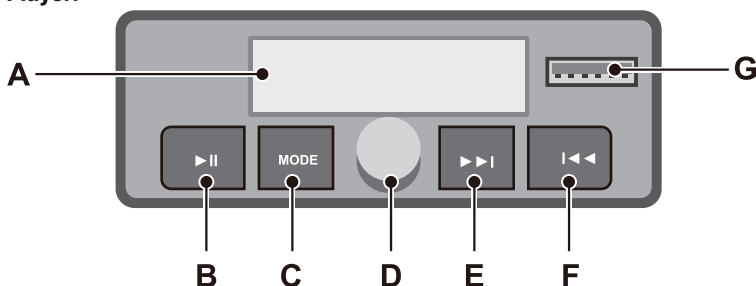


- A. Display Screen:** When the product is stopped, it displays the remaining battery level. If the displayed value falls below 12 (for 12V products) or 24 (for 24V products), please recharge the battery.
- B. Play / Pause Button:** Press and hold down this button for the FM radio to manually or automatically search for stations.
- C. Audio source button:** Allows you to change between different audio inputs such as FM radio (if equipped), USB port, Story mode, Music mode and Wireless connection (if equipped). In FM radio mode, holding down Button B (Play/Pause) enables you to manually or automatically search for radio stations.
- D. Volume knob:** Adjust the volume up or down.
- E. Next Track / next channel**
- F. Previous Track / previous channel**
- G. USB Interface:** Connects your portable device to play audio through the product's speakers, also supporting MP3 format exclusively.

Use the Rear Foot Pedal

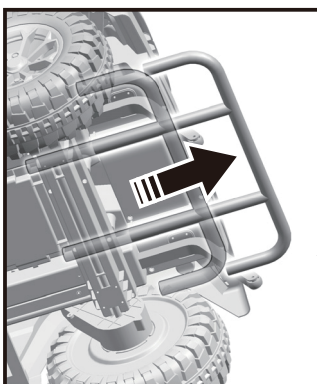

WARNING!

Pull out the rear foot pedal when using this product.

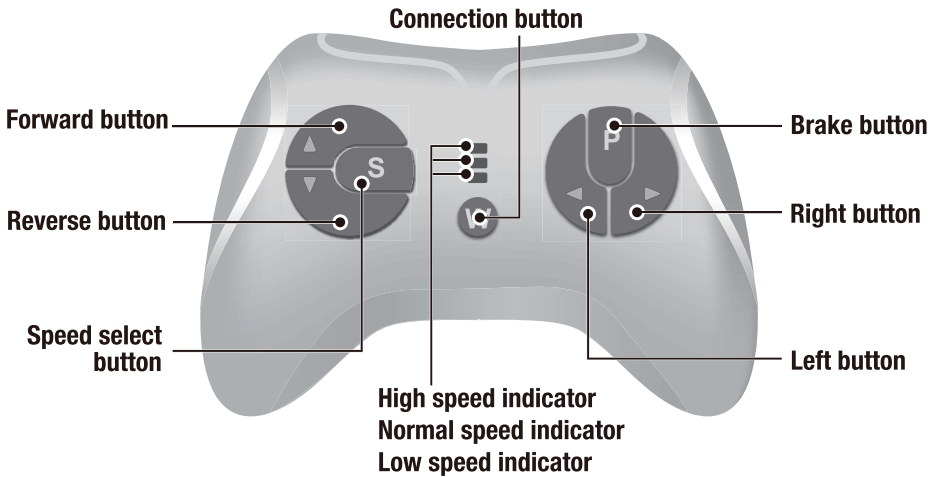

Insert the batteries of controller

Lift the battery compartment door on the back of the controller and insert two AAA(LR03) batteries.

HINT: Batteries not included. Refer to the Battery Information on the page 1.

1. Build connection

Press the Connection button for 2 seconds, the status indicator flashes, then turn on the power switch located on the the vehicle dash, when the status indicator turns off about 2 seconds and turns into long bright, means the connection successful. If the status indicator makes no response, means the connection failed. Replace the batteries and try again.

2. Brake button

Press the button to stop the vehicle, press it again to release the brake.

3. Speed select button

The switch operates the vehicle to move in low, normal or high speed.

HINT: This switch won't work while your vehicle moves reverse.

NOTE:

- Leave the remote controller idling for about 10 seconds, it will shut down automatically.
- Rebuild connection when you replace the batteries of the remote controller.
- The remote control is not a toy. It is intended for adult use only and should not be made by children Use. Close supervision from an adult is always required. The receiving range may vary depending on the weather、battery and other environmental conditions.



**WARNING!**

ONLY AN ADULT CAN CHARGE AND RECHARGE THE BATTERY!

**WARNING!**

This product with **Charging Protection**: when charging, all functions will be cut off!
Only an adult can charge and recharge the battery!

- The POWER SWITCH must be turned in OFF position when charging.
- Before the first use, you should charge the battery for 4-6 hours. Do not recharge the battery for more than 10 hours to avoid overheating the charger.
- When the vehicle begins to run slowly, recharge the battery.
- After each use or once a month minimum recharge time as 8 to 12 hours, less than 20 hours at most.
- Use the only rechargeable battery and charger supplied with your vehicle. NEVER substitute the battery or the charger with another brand. Using another battery or charger may cause a fire or explosion.
- Do not use the battery or charger for any other product.

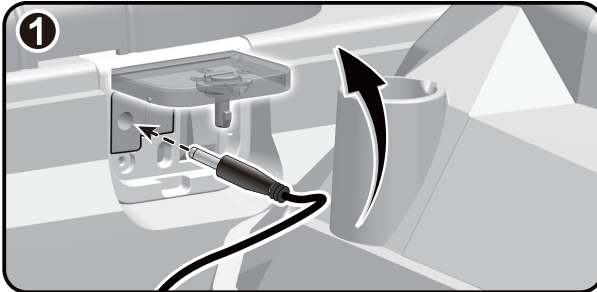**How to charge the battery**

1. Open the charging cover (below the seat). Plug the charger port into the charger socket.
2. Plug the charger plug into a wall outlet. The battery will begin charging.

Problem	Possible Cause	Solution
Vehicle does not run	Battery low on power	Recharge battery.
	Thermal fuse has tripped	Reset fuse, see <Fuse>
	Battery connector or wires are loose	Check that the battery connectors are firmly plugged into each other. If wires are loose around the motor contact your distributor please.
	Battery is dead	Replace battery, contact your distributor please.
	Electrical system is damaged	Contact your distributor please.
	Motor is damaged	Contact your distributor please.
Vehicle does not run very long	Battery is under charged	Check that the battery connectors are firmly plugged into each other when recharging
	Battery is old	Replace battery, contact your distributor please.
Vehicle runs sluggishly	Battery low on power	Recharge battery, contact your distributor please.
	Battery is old	Replace battery, contact your distributor please.
	Vehicle is overload	Reduce weight on vehicle.
	Vehicle is being used in harsh conditions	Avoid using vehicle in harsh conditions ,see <Safety>.
Vehicle needs a push to go forward	Poor contact of wires or Connectors	Check that the battery connectors are firmly plugged into each other. If wires are loose around the motor, contact your distributor please.
	“Dead Spot” on motor	A dead spot means the electric power is not being delivered to the terminal connection and the vehicle needs repair. Contact your distributor please.
Difficult shifting from forward to reverse or vice-versa	Attempting to shift while the vehicle is motion	Completely stop the vehicle and shift, see <Use Your New Vehicle>
Loud grinding or clicking noises coming from motor or gear box	Motor or gears are damaged	Contact your distributor please.
Battery will not recharge	Battery connector or adapter connector is loose	Check that the battery connectors are firmly plugged into each other.
	Charger not plugged in	Check that the battery charger is plugged into a working wall outlet.
	Charger is not working	Contact your distributor please.
Charger feels warm when recharging	This is normal and not a cause for concern	

Completely read through this manual and the troubleshooting guide table before calling. If you still need help resolving the problem **Contact your distributor please.**

- It is parents' responsibility to check main parts of the toy before using, must regularly examine for potential hazard, such as the battery, charge, cable or cord, plug, screws are fastening enclosure of other parts and that in the event of such damage, the toy must not be used until that damage had been properly removed.
- Make sure the plastic parts of the vehicle are not cracked or broken.
- Occasionally use a lightweight oil to lubricate moving parts such as wheels.
- Park the vehicle indoors or cover it with a tarp to protect it from wet weather.
- Keep the vehicle away from sources of heat, such as stoves and heaters. Plastic parts may melt.
- Recharge the battery after each use. Only an adult can handle the battery. Recharge the battery at least once a month when the vehicle Raider is not being used.
- Do not wash the vehicle with a hose. Do not wash the vehicle with soap and water. Do not drive the vehicle in rainy or snowy weather. Water will damage the motor, electric system and battery.
- Clean the vehicle with a soft, dry cloth. To restore shine to plastic parts, use a non-wax furniture polish. Do not use car wax. Do not use abrasive cleaners.
- Do not drive the vehicle in loose dirt, sand or fine gravel which could damage the moving parts, motors or the electric system.
- When not using, all the electrical source should be turn off. Turn off the power switch and disconnect the battery connection.

The battery features a thermal fuse with a reset fuse that will automatically trip and cut all power to the vehicle if the motor, electric system or battery is overloaded. The fuse will reset and power will be restored after the unit is turned OFF for 20 seconds and then turned ON again. If the thermal fuse trips repeatedly during normal use, the vehicle may need repair. Contact your distributor please.

To avoid losing power, follow these guidelines:

- Do not overload the vehicle.
- Do not tow anything behind the vehicle.
- Do not drive up steep slopes.
- Do not drive into fixed objects, which may cause the wheels to spin, causing the motor to overheat.
- Do not drive in very hot weather, components may overheat.
- Do not allow water or other liquids to come in contact with the battery or other electric components.
- Do not tamper with the electric system. Doing so may create a short, causing the fuse to trip.

Our products are suitable for ASTM F963; GB6675; EN71 and EN62115 standard.

Disposal Of Battery



- Your sealed lead-acid battery must be recycled or disposed of in an environmentally sound manner.
- Do not dispose of your lead-acid battery in a fire. The battery may explode or leak.
- Do not dispose of a lead-acid battery in your regular, household trash. The incineration, land filling or mixing of sealed lead-acid batteries with household trash is prohibited by law.